

# SPORT PROTECTION





### ***Adjustable temple tips***

*With just a click the temple can be interchanged with the supplied elasticated strap.*

### ***Easy lenses assembling***

## **High quality**

We supply the frame with Plano Polycarbonate Lenses with an index of 1.59.

## **Protection and Comfort**

The soft-touch rubber inserts on the inside of the frame front and on the inside of the temples ensures a perfect fit with maximum impact resistance. Furthermore, ocular Design enhances performance to prevent fogging.

## **Assembly**

To insert the lenses into the frame, it is necessary to open the ocular shape by unscrewing both the screws and removing the initial section of the temple.

### Double function 1 + 2

This frame can be worn with either temples that have adjustable temple tips or with just a click they can be interchanged with the supplied elasticated strap.



**From 1 to 2 just in one click!**


**1** Frame with adjustable temple tips



**2** Frame with elasticated strap

# SPORT PROTECTION

## Ventilation System

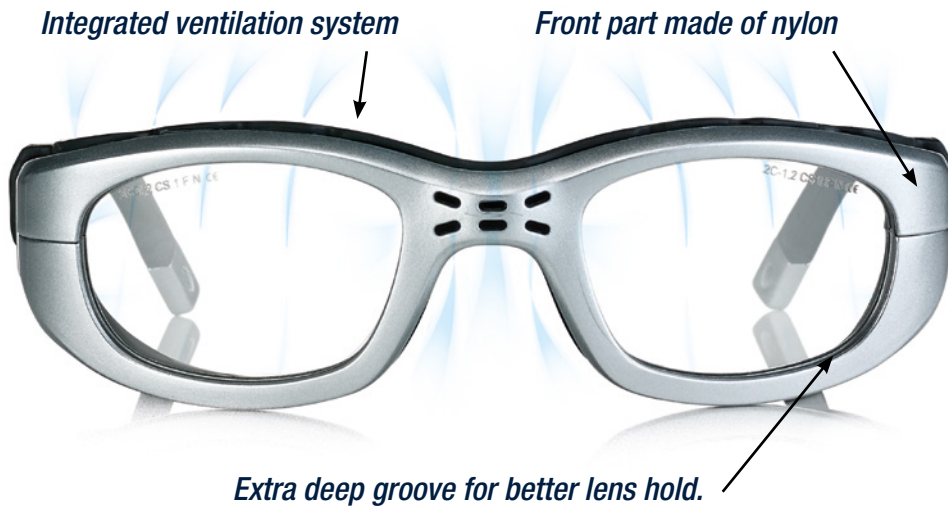


### ***Ventilation System and Anti-Fog Treatment***

The integrated ventilation system combined with the anti-fog treatment on the plano lenses reduces fogging.

### ***Protection and comfort***

The frame made of nylon and the oculars made of polycarbonate make the frame safe and shock resistant. The soft touch rubber inserts on the inside of the front provide a perfect fit.

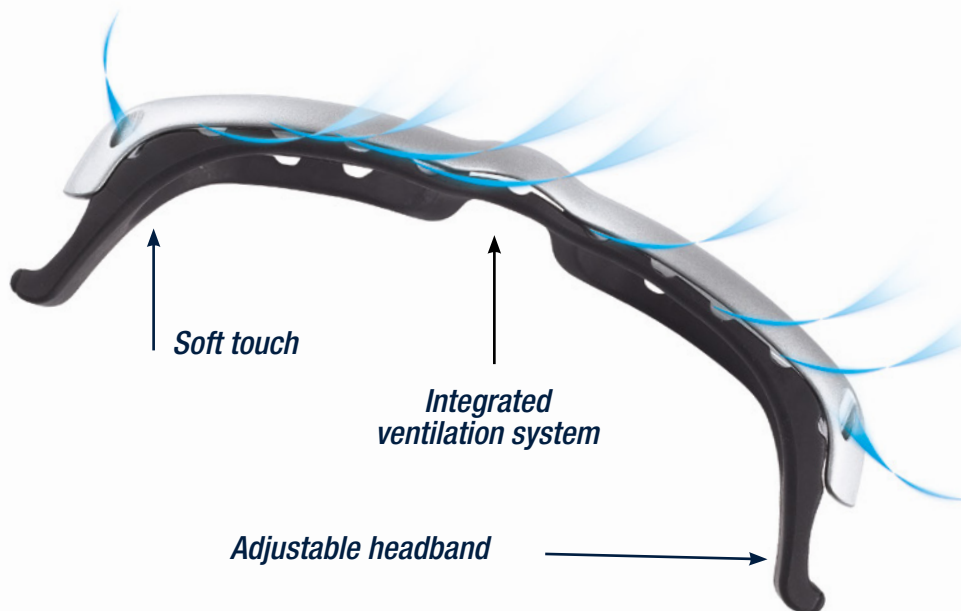

# SPORT PROTECTION

Certification & Tests

## Certification

The sports frame is an individual protection product category 2° according to the Regulation (EU) 2016/425 and the standard EN 166:2001.

## Tests

The tests, carried out by Certottica, demonstrate that the **frame has guaranteed appropriate mechanical protection** as it **protects the wearer** from small objects at high speed and low **energy impact during sports activity**. The test has also shown that the ocular **offers good performance** as it has **antifog resistance**.

## VISIBILITY

Ref. 11327GB

Showcard on request.

For Ref. F0257

Size: 21x29,7 cm



# SPORT PROTECTION | mod. F0257

- Nylon frame with soft touch rubber inserts inside of the frame
- Double function: adjustable temple tips and elasticated strap.
- Clear PC Lenses - 2,0 mm - UV400 protection - Anti-Fog



scale 1:1

□ 47	⌒ 21	B 6	⌒ 130	○ 32,15	👓 129,3	📐 Wrap Angle <b>17,7°</b>	<b>SMALL</b>
□ 49	⌒ 21	B 6	⌒ 130	○ 33,10	👓 130,4	📐 Wrap Angle <b>17,2°</b>	<b>MEDIUM</b>
□ 51	⌒ 21	B 6	⌒ 130	○ 33,91	👓 133,5	📐 Wrap Angle <b>17,9°</b>	<b>LARGE</b>

CE SPECIFICATIONS IN ACCORDANCE WITH REGULATION (UE) 2016/425 AND WITH EN166:2001.



Each frame is supplied with a case.



# SPORT PROTECTION

Colours



## Red

Ref. F025747092000  47

Ref. F025749092000  49

Ref. F025751092000  51



## Silver

Ref. F025747288000  47

Ref. F025749288000  49

Ref. F025751288000  51

Ref. F0257BT Black spare temples

Ref. F0257EB Spare elasticated strap

# SPORT PROTECTION | mod. F0257

- Nylon frame with soft touch rubber inserts inside of the frame
- Double function: adjustable temple tips and elasticated strap.
- Clear PC Lenses - 2,0 mm - UV400 protection - Anti-Fog



scala 1:1

□ 47	⌵ 21	B 6	⌵ 130	○ 32,15	👓 129,3	📐 Angolo di Avvolgenza 17,7°	<b>SMALL</b>
□ 49	⌵ 21	B 6	⌵ 130	○ 33,10	👓 130,4	📐 Angolo di Avvolgenza 17,2°	<b>MEDIUM</b>
□ 51	⌵ 21	B 6	⌵ 130	○ 33,91	👓 133,5	📐 Angolo di Avvolgenza 17,9°	<b>LARGE</b>
□ 53	⌵ 21	B 6	⌵ 130	○ 33,8	👓 136,4	📐 Angolo di Avvolgenza 18°	<b>X-LARGE</b>
□ 55	⌵ 21	B 6	⌵ 130	○ 36	👓 137,5	📐 Angolo di Avvolgenza 18°	<b>XX-LARGE</b>



Each frame is supplied with a case.





# SPORT PROTECTION

Colours



## Black

Ref. F025747001000  47

NEW

Ref. F025749001000  49

NEW

Ref. F025751001000  51

NEW

Ref. F025753001000  53

Ref. F025755001000  55



## Blue

Ref. F025747242000  47

Ref. F025749242000  49

Ref. F025751242000  51

Ref. F025753242000  53

Ref. F025755242000  55

Ref. F0257BT Black spare temples

Ref. F0257EB Spare elasticated strap



SPECIFICATIONS IN ACCORDANCE WITH REGULATION (UE) 2016/425 AND WITH EN166:2001.

centrostyle.com

